



IMPEDANCE / PHASE COUPLING DEVICE

HOOKUP DIAGRAMS


This device is designed to be wired in series with the loudspeaker as shown. Variations may also be tried such as placing it in series with the negative speaker lead. The device is non-directional. It does not matter which end of the "gizmo" is pointing towards the loudspeaker.

Electrically both of these hookup options are exactly the same.

The black binding posts are not part of the circuit. They are internally connected by a piece of wire.

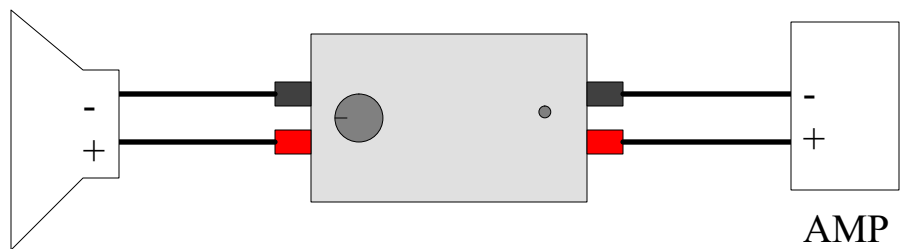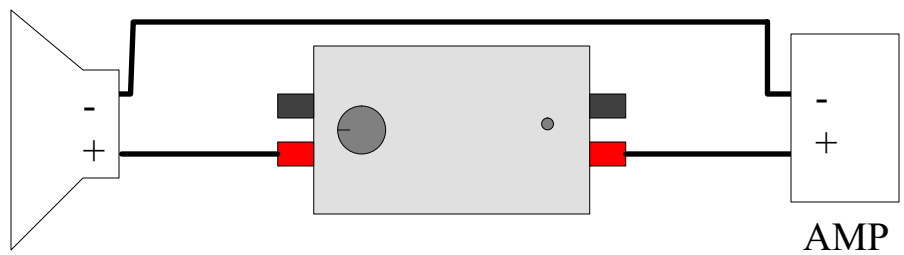

Rotated 1/4 turn counter clockwise represents approx 3dB of attenuation. This should be your ending point. This small 1/4 turn window is where tiny adjustments can make big differences in the sound of your Lowther speaker.

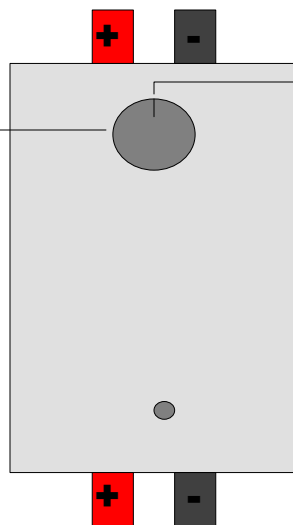

This is the full on position, rotated clockwise to the stop. This should be your starting point.